


Stainless steel valves with ANSI-flanges

- valve body AISI 316L (EN 1.4404) / AISI 304L (EN 1.4307)
- ball massive / shell type AISI 316L / AISI 304L
- manual hand lever AISI 304L
- ANSI-flanges AISI 316L / AISI 304L
- ball seats PTFE / PTFE+C / PEEK
- o-rings FPM / PTFE / EPDM / NBR / FFKM / FEPM
- ISO 5211 mounting plate for actuator



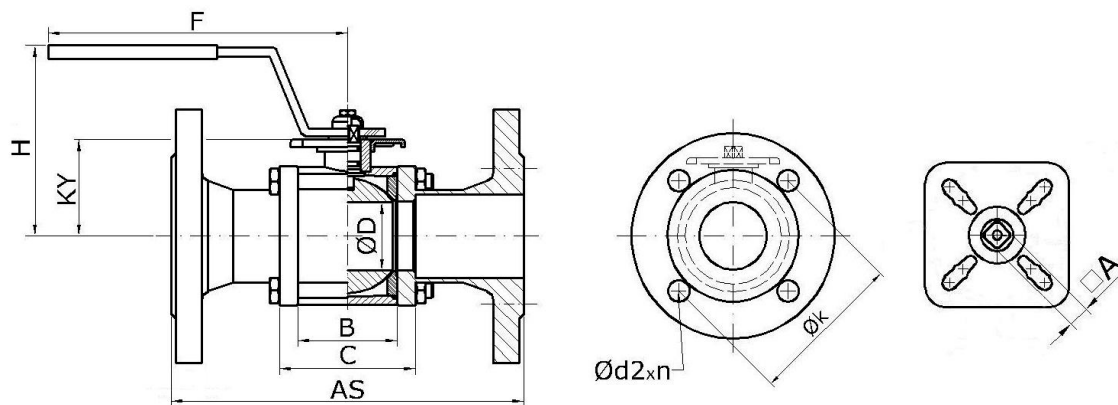

NOM SIZE DN		BALL								Ø			ISO
mm	in	Dø	PN / CLASS	AS	B	C	KY	F	H	d×n	øk	A	5211 F
15	1/2	15	25 / 300	130	30	42	31	150	50	15,9×4	66,7	11	05
20	3/4	25	25 / 300	150	36	52	39	150	60	19,0×4	82,6	11	05
25	1	25	25 / 300	160	36	52	39	150	60	19,0×4	88,9	11	05
32	1¼	32	25 / 300	180	50	66	54	200	90	19,0×4	98,4	11	05, 07
40	1½	48,5	25 / 300	200	65	85	63	200	100	22,2×4	114,3	11	05, 07
50	2	48,5	25 / 300	230	65	85	63	200	100	19,0×8	127,0	11	05, 07
65	2½	48,5	25 / 300	290	65	85	63	200	100	22,2×8	149,2	11	05, 07
65	2½	55	16 / 150	290	77	101	73	260	165	19,0×4	139,7	17	07, 10
65	2½	67	16 / 150	290	90	114	81	260	170	19,0×4	139,7	17	07, 10
80	3	67	16 / 150	310	90	114	81	260	170	19,0×4	152,4	17	07, 10
80	3	80	16 / 150	310	116	140	94	260	185	19,0×4	152,4	17	07, 10
100	4	80	16 / 150	350	116	140	94	260	185	19,0×8	190,5	17	07, 10
100	4	90	16 / 150	350	126	158	103	310	205	19,0×8	190,5	22	10, 12, 14
100	4	100	16 / 150	350	136	168	111	310	220	19,0×8	190,5	22	10, 12, 14
125	5	100	16 / 150	400	136	168	111	310	220	22,2×8	215,9	22	10, 12, 14
125	5	125	16 / 150	400	164	204	132	310	240	22,2×8	215,9	22	10, 12, 14
150	6	125	16 / 150	480	164	204	132	310	240	22,2×8	241,3	22	10, 12, 14
150	6	150	16 / 150	480	186	226	167	⌀	⌀	22,2×8	241,3	27	10, 12, 14
200	8	150	16 / 150	457	186	226	167	⌀	⌀	22,2×8	298,4	27	10, 12, 14
200	8	200	16 / 150	457	242	282	206	⌀	⌀	22,2×8	298,4	27	10, 12, 14
250	10	250	16 / 150	533	303	359	270	⌀	⌀	25,4×12	362,0	36	12, 14, 16
300	12	300	16 / 150	610	356	415	308	⌀	⌀	25,4×12	431,8	36	12, 14, 16